

LED 40W LINEAR FLOATING



Suspended LED Linear light fixture

VOL-1200FPL-040-NW

Modular linear lighting luminaire. For indoor applications where continuous linear lighting is desired such as perimeter lighting applications. This luminaire is suitable for surface, suspended or recessed, individually or in continuous rows while offering an optional uplight component with an internal baffle that separates uplight and downlight components.

SPECIFICATION

Wattage	40W
Light Output	>4800lm
Efficacy	120lm/w
CRI	>80
CCT	3000-6000K
Power Factor	>0.97
Rated Input	AC100-277V 50/60Hz
Ambient Temperature	- 25°C ~ + 40°C
Warranty	5 Years

ELECTRICAL(OPTION)

Dimming

Note: Specification subject to change without notice.

FEATURE


Long life LEDs coupled with high efficiency drivers provide qualified illumination. Rated to deliver performance >50000 hours. Optional supplied with dimmable driver (1-10V). Standard 4 foot nominal white. Aircraft cable for suspended-mount application in office areas, retail stores, corridors, classrooms, libraries, hospitality.

Without screws on the end caps, quicker fitting for continuous run without shadow. Suspended, ceiling, recessed mounted for different applications

DIMENSION

All dimensions are inches(mm) unless otherwise noted.

Length	Width	Depth
48 (1176)	2 3/4 (73)	3 1/7 (80)

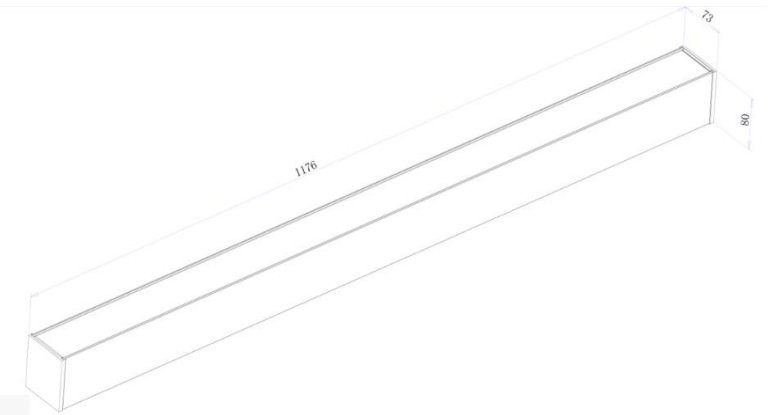

völlner®
lighting

...the future