



4FT LINEAR LIGHT

SECTION 1: GENERAL DESCRIPTION (FIXTURE AND DRIVER)

Model Number:	VOL-LL-036-CW-4FT
Size:	4FT
Voltage:	85-277V
Power:	36W
Hue:	C/W
Material:	PC,Frosted
Light Output:	4320 Lumens
Beam Angle:	120 Degrees
Correlated Colour Temperature:	6000-6500K
Fixture Life span:	50,000 hours
Dimension	1200x43x77mm
IP Rating:	65

SECTION 2: CERTIFICATIONS MET

1. UL Listing: Underwriters Laboratory testing for dependable reliability and lifespan of fixture
2. RoHS Certification: Restriction of Hazardous Substances- Ensuring no toxic chemicals or materials are used in the manufacture.
3. CE Certification: (Conformity European) to ensure that this product can be within the strictest standards of Europe.

SECTION 3: LIGHT SOURCE DESCRIPTION (LED CHIP)

LED type	Sanan
Number of LEDs	180

SECTION 4: COMPARABLE OLDER LIGHT SOURCE

4 Feet Double Tube Vapor Proof Fixture	4FT Linear Light
72 Watts Power	36 W Power
8000 Hour Lifespan	50,000 Hour Span
<IK4 Impact Resistance	Ik10 Impact Resistance
2 Points of Failure (Ballast + Bulb)	No Ballast
Carries no warranty	Always have warranty
Contains deadly mercury gas	RoHS certified for no toxic chemicals
Does not function well in cold environments	Operating -20-+70 Degrees Celsius


SECTION 5: INSTALLATION

For installation the following materials are required:

2 pieces of hooks

2 screws (used to fix the hooks to the wall or ceiling)

1. Disconnect the power supply before installation of the light or when conducting any maintenance work.
2. Installation and maintenance must be carried out by a qualified personnel or an electrician.
3. First connect the waterproof terminal box with L (Brown wire) and N (Blue wire). Always ensure the L and N is matching.

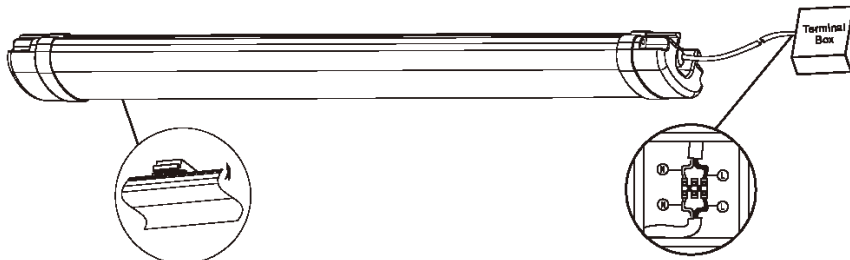

4. Insert the lights' fittings into the hooks
5. Secure the waterproof terminal box properly