




VOL-DTD-050-CW

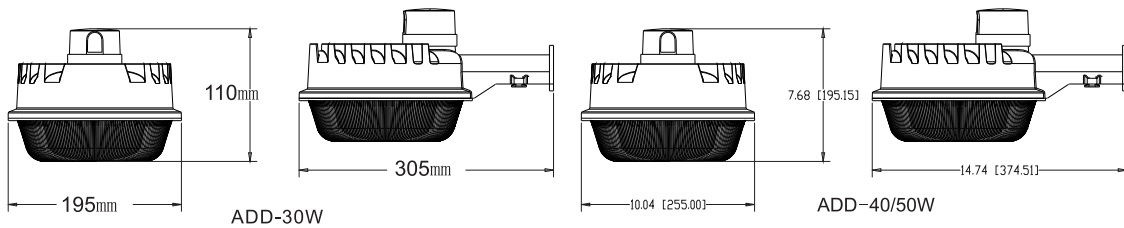

FEATURES

- Die-cast aluminum housing with durable powder coat finish
- Prismatic poly carbonate diffuser
- CITIZEN COB technology
- Standard Surface mount
- Optional arm mount
- Easy installation with hands free mounting
- 120-277V Photocell as option
- 10kA Surge Protector as option
- Dimmable driver as option



SPECIFICATIONS

	COB	CITIZEN COB	COB
LED Engine	COB	CITIZEN COB	COB
Delivered Lumens(lm)	2,700	4,000	4,500
Efficacy(lm/W)	100		
CCT	5000K(4000K Option)		
Beam Angle	140°		
CRI	70(80 As Option)		
Base/Mount	Wall-Mount		
Input Voltage(V)	120-277Vac/347-480Vac		
Power Factor	> 0.9		
Operating Temperature	-30°Fto104° F		
Certification	UL,cUL,DLC,LM-79,Lighting Facts		
Environment	Wet Location IP 65		